

ProxDa



SerialTime TR515S

Online Time Recorder
with Serial Interface

ProxDa

SerialTime TR515S Online Time Recorder with Serial Interface

INTRODUCTION :

TR515S Serial-interfaced Time Recorder is simple to install and operate , this Time and Attendance terminal provides all the basic Time Recorder functionality in an attractive and cost-effective package .

Extremely versatile , TR515S terminal can be used as either a wall-mount or as a desktop device . An excellent viewing angle is provided in both orientations by rotating the unit 180 degrees .

FEATURES :

- Equipped with both serial interfaces , RS-232 & RS-485
 - RS-232 interface for single unit installation
 - RS-485 interface for multi-units or long distance
- Bright , high-contrast blue LED display shows time of day , last 4 digits of the ID-code and error messages
- Approximately 8200 records storage capacity
- Built-in Ring relay for external ring (bell) control
- Daily bell schedule of up to 32 different entries
- Built-in Magnetic Card , RFID or Mifare reader 13.56Mhz or Barcode reader
- Two buttons for clocking IN and OUT


SPECIFICATIONS :

- a. Display : 4 x 7-segment Blue light LED
- b. Magnetic card reader : ISO Track 2 , 75 BPI
- c. Barcode reader : Visible or IR , numerical **Code 39**
- d. RFID reader : 125 KHz , ASK , 64 bits, Manchester coding, or Mifare reader 13.56Mhz
- e. Database capacity : App. 8200 records
- f. Serial interface – RS-232 & RS-485
- g. Bell control relay : 1A , 12 V max.
- h. Power supply : DC 9 V , 500 mA
- i. Dimensions : W185 x H110 x D51 mm
- j. Installation : Wall-mount or desktop
- k. Operating temperature : 0 ~ 55 Deg. C
- l. Operating humidity : 5 ~ 95 % relative

AVAILABLE VERSIONS :

- TR515SM – with Magnetic card reader
- TR515SR – with RFID card reader
- TR515SR-MF - with Mifare RFID card reader, 13.56Mhz
- TR515SB – with LED Barcode card reader
- TR515SF – with IR Barcode card reader

- **Ethernet interface model is available on request .**
- Wireless interface model is also available on request .**

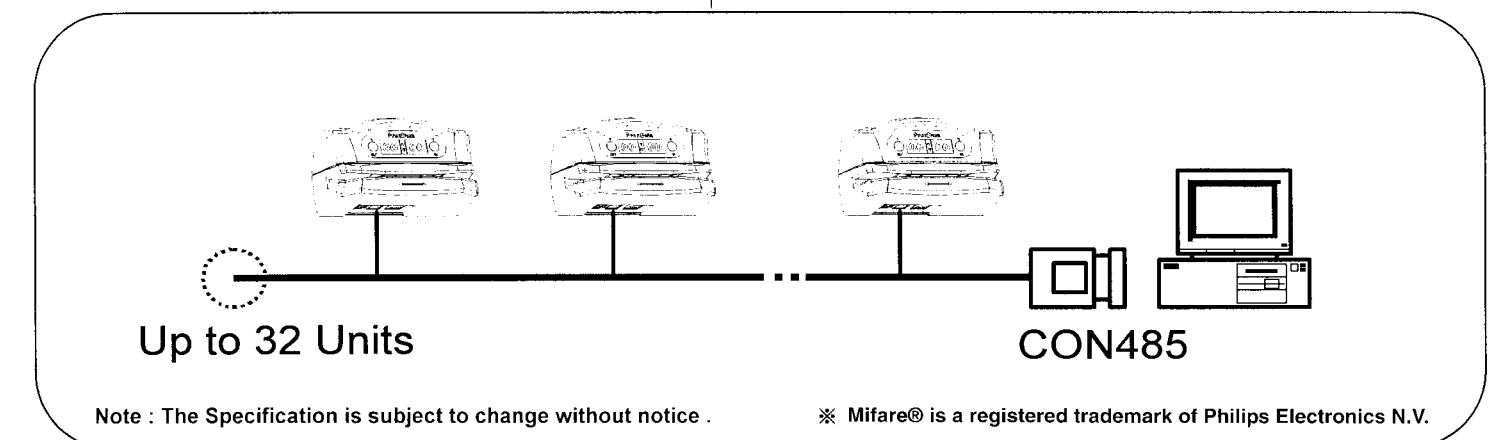

We welcome OEM inquiries

- Custom design manufacturing is available
- Custom device programming is available
- Call factory for other configuration

集佳股份有限公司
GIGA-TMS INC.

8F.,NO.31, LANE 169, KANG-NING
STREET,HSI-CHIH,TAIPEI,TAIWAN

TEL: 886-2-26954214

FAX: 886-2-26954213

e-mail: gigatms@ms3.hinet.net

http://www.gigatms.com.tw